


LITE-GLIDE PANEL BLIND SYSTEM WITH 4 CHANNEL TRACK AND WAND OPERATION

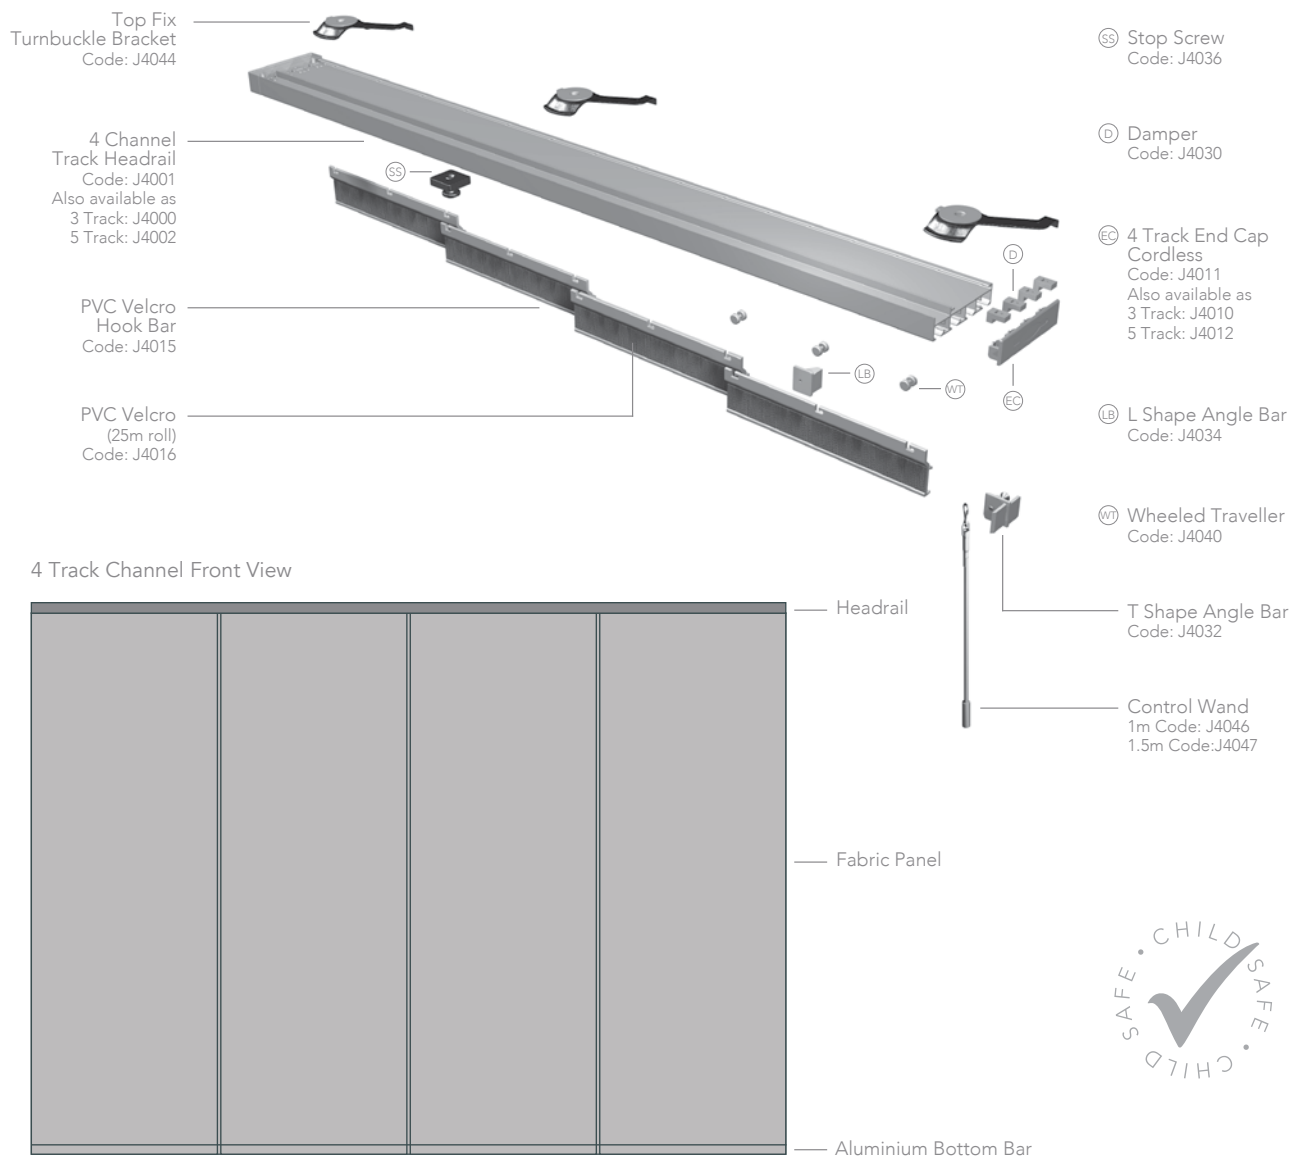

- Designed and manufactured in the UK, all Louvolite systems are 10 year life cycle tested to ensure long lasting performance.
- A contemporary way to control light, glare, view and privacy for larger areas of glass such as floor to ceiling glazed areas and patio doors, or as room dividers.
- Manufactured using high quality aluminium and plastic materials.
- Available as 3, 4 and 5 track channels in 5m lengths or add a joining plate (J4013) to lengthen.
- Split draw or one way side draw function to suit preference.
- Operation with either a 1m or 1.5m control wand or cord with cord tidy for child safety.
- When open, the panels stack neatly behind one another.
- Used with an Easy fit aluminium bottom bar R8125 or the new dual face Gemini R8128, to weight the fabric panels down.
- Colours available: Headrail and Control wand: white; Gemini bottom bar and end caps: white, black, light grey, anthracite grey, chrome and bronze; Easy fit bottom bar and end caps: white, grey, black and clear.

HARDWARE SPECIFICATION

Lite-Glide Panel System

Our panel blinds are manufactured using a white coated aluminium 3, 4 or 5 track system with Nylon end caps in either cordless or corded.

The fabric panels are fixed on to the PVC self-adhesive hook bar with adhesive loop attached to the top of the fabric panel. Nylon wheeled travellers assist in smooth operation.

Operated as right or left hand stack options or as a split draw using the aluminium control wand or with 4mm

Nylon cord and cord tidy. The brackets, made from mild steel and zinc plated, are suitable for top or face fixing.

Performance
To ensure a positive performance, all system components are designed using prime quality plastic materials and powder coated aluminium and the unique turnbuckle bracket securing the track safely after installation.
10 year life cycle testing is done to ensure long lasting performance.


Operation
All blinds must be compliant with the child safety elements of BS EN13120. Where children may be present, the chain must be fitted with cord tidy devices.

Bottom Bar
Easy fit bottom bar, made of aluminium, can either be wrapped with a contrasting fabric or as single or double wrapped in the same fabric or left exposed. The dual face Gemini, smooth on one side and angular on the other is made of aluminium, only has the fabric formed

and locked into the top part to leave the bar exposed. All fabric is formed and held into place with locking tape. Both bottom bars give you the option to wrap thicker laminated fabrics.

Maintenance
All of the system components are manufactured using aluminium, plastic or stainless steel. They do not present any corrosion problems in normal environments. The system has been designed for smooth operation, together with a rigidity to prolong the window blind's working life.

HEADRAIL/TRACK DIMENSIONS

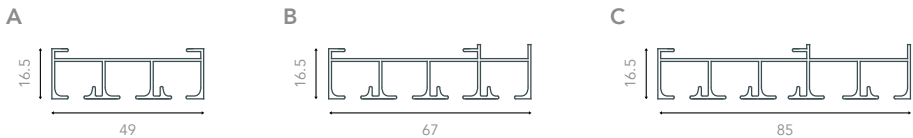

A. 3 track channel side view
B. 4 track channel side view
C. 5 track channel side view

LOUVOLITE RECOMMENDED PANEL SIZE GUIDELINE

One Way 'Side' Draw

BLIND WIDTH	3 Panel	4 Panel	5 Panel
	3 Track	4 Track	5 Track
2000	700	538	440
2050	717	550	450
2100	733	563	460
2150	750	575	470
2200	767	588	480
2250	783	600	490
2300	800	613	500
2350	817	625	510
2400	833	638	520
2450	850	650	530
2500	867	663	540
2550	883	675	550
2600	900	688	560
2650	917	700	570
2700	933	713	580

Split Draw

BLIND WIDTH	4 Panel	6 Panel	8 Panel
	3 Track	4 Track	5 Track
2000	538	375	294
2050	550	383	300
2100	563	392	306
2150	575	400	313
2200	588	408	319
2250	600	417	325
2300	613	425	331
2350	625	433	338
2400	638	442	344
2450	650	450	350
2500	663	458	356
2550	675	467	363
2600	688	475	369
2650	700	483	375
2700	713	492	381

Smaller and larger sizes available upon request or refer to page 149 of the Fabrics & Components Pricelist 2019.

Your Louvolite Panel System Distributor:



UK MANUFACTURED

www.louvolitecommercial.com

CI/SIB 1976 reference by SIB Agency		
(76.7)	X	