


LOUVOLITE PERFECT FIT® INTERNATIONAL FOR PLEATED ROOF AND SIDE BLINDS

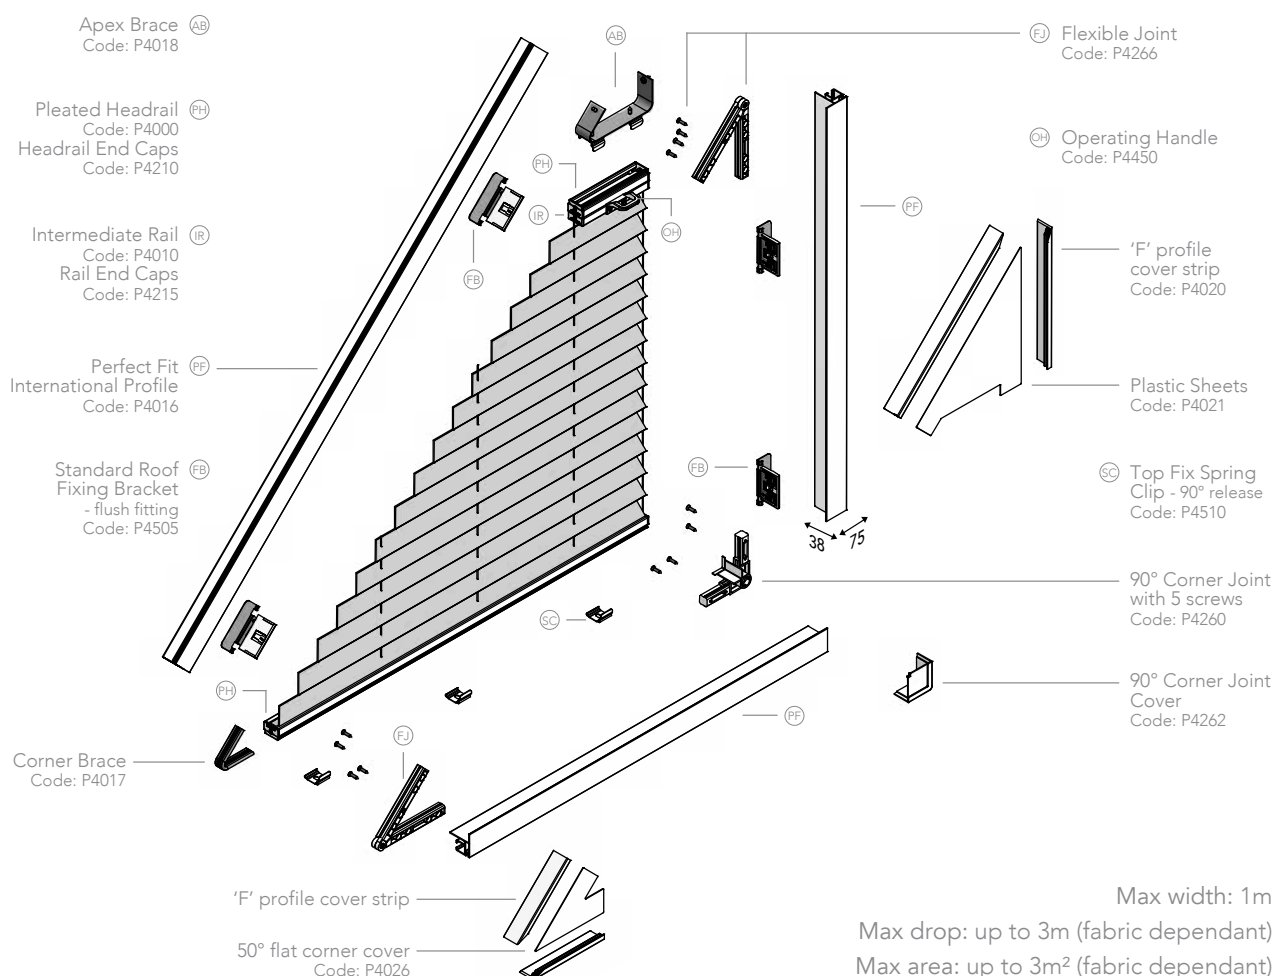

Max width: 1m

Max drop: up to 3m (fabric dependant)

Max area: up to 3m² (fabric dependant)

- Designed and manufactured in the UK, all Louvolite systems are 10 year life cycle tested to ensure long lasting performance.
- For the angled shapes of roof windows or side windows.
- The blind within the Perfect Fit frame clicks into UPVC or timber windows with a rubber seal using window fixing brackets and can easily be removed.
- No drilling or screwing needed for installation.
- Reduces the gaps and light strike at the edge of the blind.
- Manufactured using high quality engineering grade polymer and aluminium.

- Standard bracket and multiroof bracket cover bead depths from 12-22 and recess over 22.
- Uses a manual operating handle and detached 2m operating wand with twist lock (P4462).
- Colours: white or brown.

HARDWARE SPECIFICATION

Perfect Fit Int. Pleated System

Our Perfect Fit International pleated blinds are manufactured using specifically designed aluminium profiles and headrails. The specified fabrics are held between the headrail and intermediate rail.

The plastic operating handle is used with a 2m metal operating twist lock wand. The mild steel window fixing brackets are zinc plated and powder coated.

Performance

To ensure a positive performance, all Perfect Fit Int. pleated system units are designed and manufactured in the UK using prime quality plastic materials and aluminium.

10 year life cycle testing is done to ensure long lasting performance.

Operation

All blinds must be compliant with the child safety elements of BS EN13120.

Maintenance

All of the system components are manufactured using aluminium, treated steel and plastic. They do not present any corrosion problems in normal environments. The system has been designed for a smooth operation, together with a rigidity to prolong the blind's working life.